


**970-0040** **MOTORIZED SCREWS**

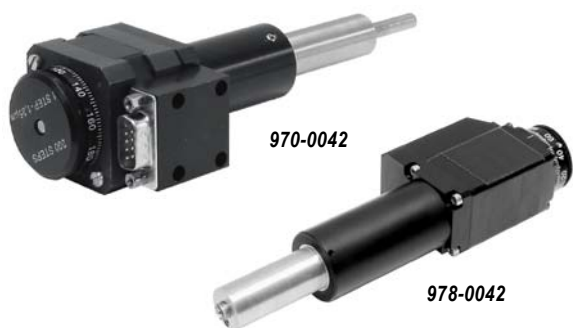


SPECIFICATIONS

Model	970-0040	978-0040
Travel range	970-0042, 978-0042	10 mm
	970-0045, 978-0045	25 mm
Resolution in full step		1.25 μm
Lead screw pitch		0.25 mm
Nominal force	60 N	80 N
Motor connector	HDB9(M)	HDB15(M)
Stepper motor	4233	28
Mechanical end limit switches	2, pushed is "closed"	


- Manual drive with a dial knob
- Resolution 0.156 μm in 1/8 step
- Scale on the dial knob allows reading accuracy to a step
- Two limit switches
- Optional power supplies for higher voltages/speeds are available

Model	M, mm	L min, mm	L max, mm	Weight, kg	Price, EUR
970-0042	37	143.5	153.5	0.5	296
970-0045	47	153.5	178.5	0.55	306
978-0042	37	157.5	167.5	0.45	280
978-0045	47	167.5	192.5	0.5	290

*Other types of motors can be installed on request.*

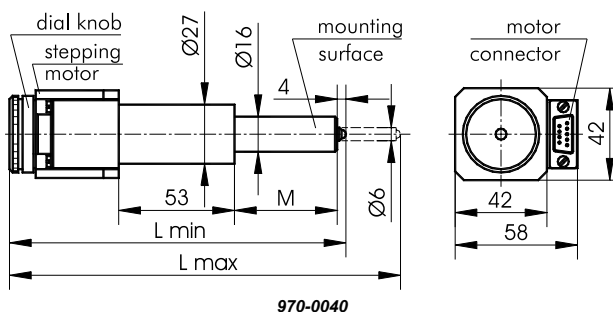

970-0040

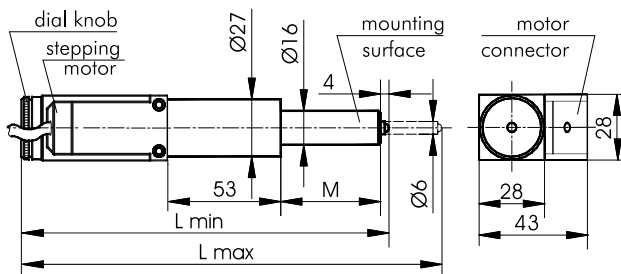

978-0040

OPTICAL  
TABLES

BRACKETS &  
RAILS

BASE MOUNTS &  
ACCESSORIES

OPTICAL  
MOUNTS

OPTICAL  
POSITIONERS

BASE  
POSITIONERS

TRANSLATION &  
ROTATION STAGES

ADJUSTMENT  
SCREWS

MOTORIZED  
POSITIONERS