

**715**

**ALUMINIUM BREADBOARDS**


- Thickness 15 mm
- M6 tapped holes pattern on 25 mm centres
- Clear and black anodized

Model	b, mm	l, mm	Thickness, mm	Weight, kg	Price, EUR
715-1515-BL	150	150	15	0.95	57
715-2020-BL	200	200	15	1.7	92
715-2040-BL	200	400	15	3.4	140
715-3030-BL	300	300	15	3.8	142
715-3045-BL	300	450	15	5.7	184
715-3060-BL	300	600	15	7.6	248
715-4080-BL	400	800	15	13.5	483
715-4545-BL	450	450	15	8.5	285
715-4560-BL	450	600	15	11.35	363
715-4575-BL	450	750	15	14.2	448
715-6060-BL	600	600	15	15.2	462
715-6080-BL	600	800	15	20.1	612
715-7575-BL	750	750	15	23.6	645
715-8080-BL	800	800	15	26.9	816

Ordering information

NOT anodized breadboard of size 400×800×15 mm	<b>715-4080</b>
Black anodized breadboard of size 400×800×15 mm	<b>715-4080-BL</b>

*Custom sizes are available on request.*

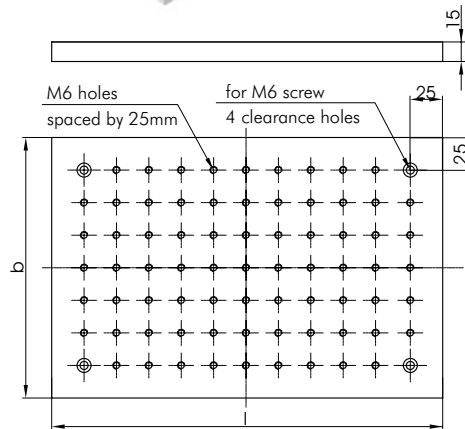

**716**

**SOLID STEEL BREADBOARD**





716-2040

- Length 400 mm; width 200 mm
- Thickness 15 mm
- M6 tapped holes pattern on 25 mm centres
- Flatness ±0.03 mm

**Solid Steel Breadboard** is an alternative to the honeycomb table tops. It is particularly useful in small optical setups.

716-2040 is a steel plate, of one size. The plate is black chemically oxidized.

The breadboards have grooves on all 4 sides, for quick mounting using Table Clamps 820-0240. On the corners there are 4 holes for M6 screw used to mount directly to tables or to fix at a certain height on Silent Rods 795-0010.

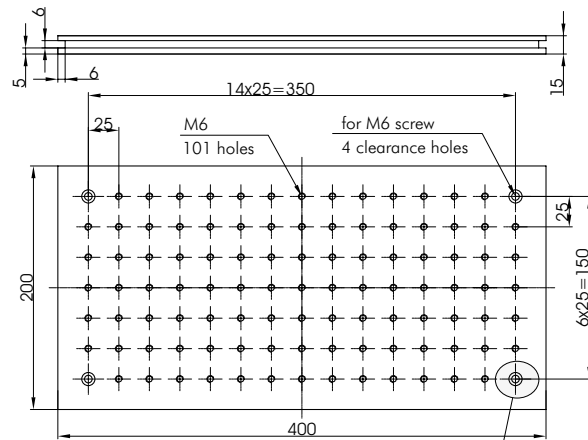

716-2040 mounted on Silent Rods 795-0010

Code	Material	Weight, kg	Price, EUR
716-2040	Black finished ferromagnetic steel	8.9	130

Complementary Products

Code	Page
795-0010	8.30
820-0240	8.41

OPTICAL TABLES

BRACKETS & RAILS

BASE MOUNTS & ACCESSORIES

OPTICAL MOUNTS

OPTICAL POSITIONERS

BASE POSITIONERS

TRANSLATION & ROTATION STAGES

ADJUSTMENT SCREWS

MOTORIZED POSITIONERS