



NOTES:


1. Material: N-BK7;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Angle tolerances: ±5 arcsec;
6. Beam deviation: 180° ±30 sec;

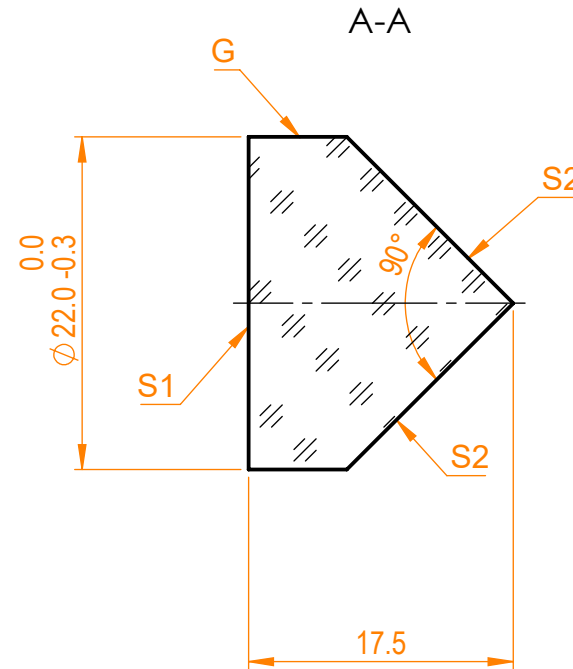

Isometric view 1:2

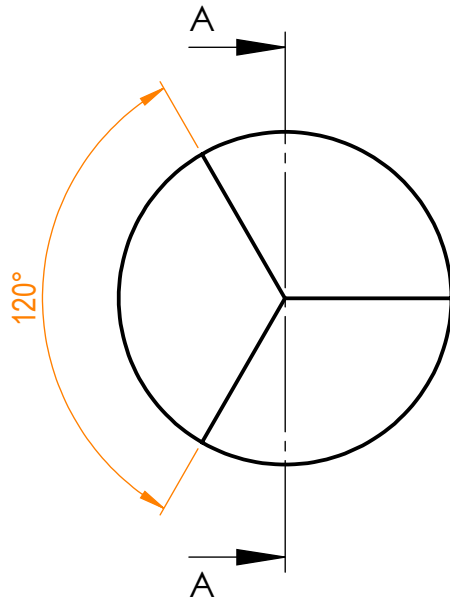

Specifications are subject to change without notice
Dimensions are for reference only

Parameters				 info@eksmaoptics.com www.eksmaoptics.com		CC prism, D=22 mm, H=17.5 mm				
	S1	S2								
Shape	Plano	Plano								
Surface flatness	λ/4 @633nm	λ/4 @633nm								
Surface quality	40-20 s/d	40-20 s/d								
Clear aperture	>80%	>80%								
Coating	Uncoated	Uncoated								
			Proprietary The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.		Approved Drawn	Name A.K. V.S.	Date 2020.12.14 2020.12.14	Part number 340-0217	Rev. A	Scale 2:1