

# 860-0092D VERTICAL DRIVE ULTRA LOW PROFILE STEEL TRANSLATION STAGES new




860-0092-02D


- Stable Steel stage
- 10 mm travel range
- Driving micrometer screw
- Precise ball bearings
- Stainless steel and vacuum versions available

**SPECIFICATIONS**

Travel range	10 mm
Sensitivity	1 µm
Tracking accuracy	2 µm
Reading accuracy	5 µm (½ div.)
Load capacity:	
horizontal	6 kg
vertical	3 kg

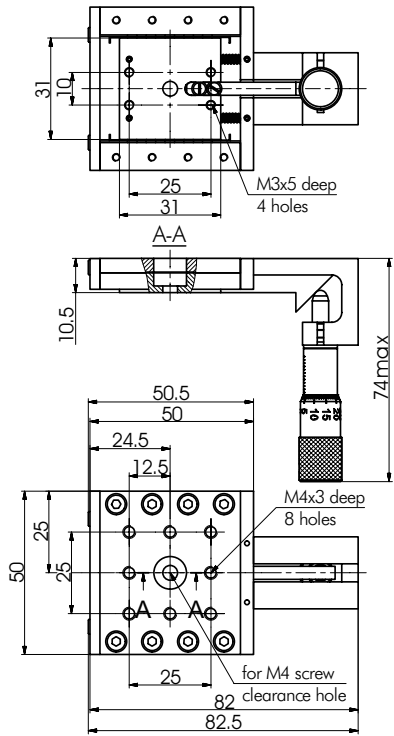

860-0092-01D

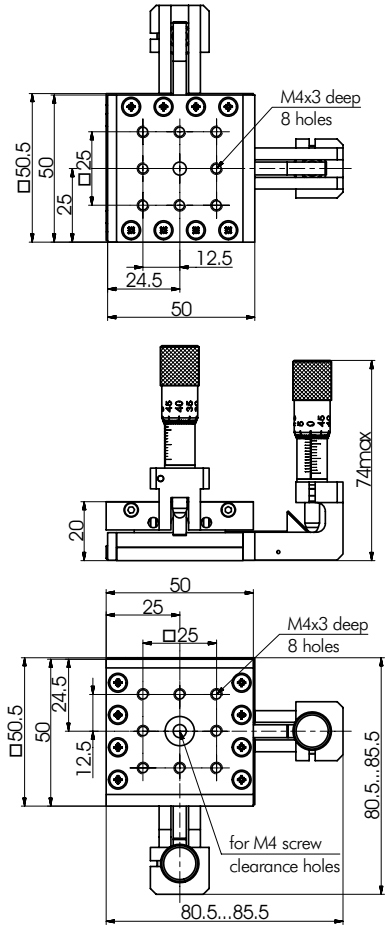

860-0092-02D

Code	Weight, kg	Price, EUR
860-0092-01D	0.15	329
860-0092-02D	0.35	625

**ORDERING INFORMATION**

Application	Model	Note
X axis	860-0092-01	Steel Version
	860-0092-01U	
	860-0092-01T	
	860-0092-01D	
X axis	860-0092-01SS	Stainless Steel Version
	860-0092-01SSU	
	860-0092-01SST	
	860-0092-01SSD	
X axis	860-0092-01SSV	Vacuum Version
	860-0092-01SSVU	
	860-0092-01SSVT	
	860-0092-01SSVD	
XY system	860-0092-02	Steel Version
	860-0092-02T	
	860-0092-02D	
	860-0092-02SS	
XY system	860-0092-02SST	Stainless Steel Version
	860-0092-02SSD	
	860-0092-02SSV	
	860-0092-02SSVD	
XY system	860-0092-02SSVU	Vacuum Version
	860-0092-02SSVT	
	860-0092-02SSVD	
	860-0092-02SSVD	

**Angle Bracket 810-0140**

Angle Bracket 810-0140 is used to transform "horizontal" translators into vertical ones.



810-0140SS

810-0140 – steel version  
810-0140SS – stainless steel version and version for vacuum

OPTICAL TABLES  
BRACKETS & RAILS  
BASE MOUNTS & ACCESSORIES  
OPTICAL MOUNTS  
OPTICAL POSITIONERS  
BASE POSITIONERS  
TRANSLATION & ROTATION STAGES  
ADJUSTMENT SCREWS  
MOTORIZED POSITIONERS