


960-0150 MOTORIZED ROTATION STAGES

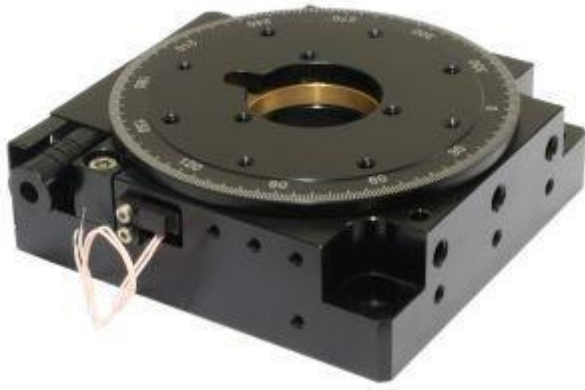

- 360° rotation graduated in 1°
- Three types of platform:
 - platform without big central hole (960-0150)
 - Ø23 mm clear aperture, M27x1 for 1" optics mounting (960-0150-23)
 - Ø30 mm clear aperture (960-0150-30)
- Resolution 4.5 arcsec in 1/8 step
- Encoders or Revolution sensors are available on request
- Inch version available

SPECIFICATIONS

Rotation range	360°
Resolution in full step	0.6 arcmin (0.01 °)
Max. rotation speed*	8 turn/min
Backlash	0 µm
Wobble	0.5 arcmin
Eccentricity	10 µm
Load capacity:	
horizontal	10 kg
radial	2 kg
torque	1 Nm

Code	Description	Price
960-0150	Rotation stage 960-0150 without motor	848 €
960-0150SM	Rotation stage 960-0150-30 with SM system	Request
962-0150-23	Rotation stage 960-0150-23 with stepper motor 4247 (1.2A, 200 steps)	921 €
962-0150-30	Rotation stage 960-0150-30 with stepper motor 4247 (1.2A, 200 steps)	936 €
964-0150-23	Rotation stage 960-0150-23 with stepper motor 4233 (0.4A, 200 steps)	913 €
964-0150-30	Rotation stage 960-0150-30 with stepper motor 4233 (0.4A, 200 steps)	928 €
968-0150	Rotation stage 960-0150 with stepper motor 28 (0.67A, 200 steps)	896 €
969-0150-23	Rotation stage 960-0150-23 with stepper motor ZSS43	1294 €