





840-0110-T. Eccentric mounting holes Ø6.2 mm for connecting cone allow handy replacement and adjustment of Adapters to required place.



840-0110-TE. This option has no clear aperture. This makes it an ideal tilt platform. The flat surface clear of holes allows to mount or paste mirrors on it.

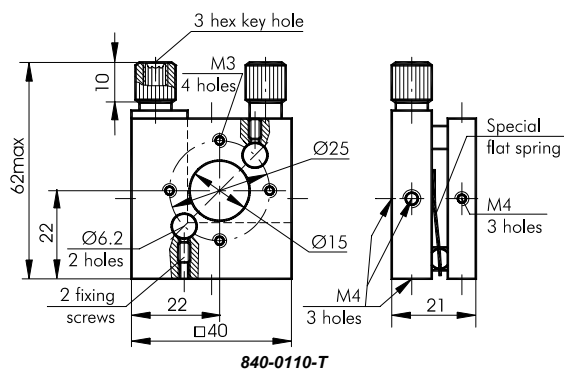

Mirror Mount of Side Regulation 840-0110-T enables to greatly increase the thickness of optical elements as it has a convenient access to the regulation handles. L-shaped flat spring of original design renders the great stability of the mount's platform. Angular range is $\pm 2.5^\circ$ about each of two orthogonal axes. Precision screws with pitch of 0.25 mm render sensitivity of 3 arcsec.

M4 tapped holes on the sides of the base allow a variety of mounting configurations, e.g. horizontal and vertical.

The mount is produced from black anodized aluminium. L-shaped spring is produced from high quality stainless spring steel.

Code	Weight, kg	Price, EUR
840-0110-B1	—	26
840-0110-B2	—	9
840-0110-T	0.09	89
840-0110-TE	0.09	80

Special Base Mounts 840-0110-B2 allow to mount 840-0110-T in different positions. 840-0110-T may be mounted as a tilt platform using 840-0110-B1

