




840-0155-06

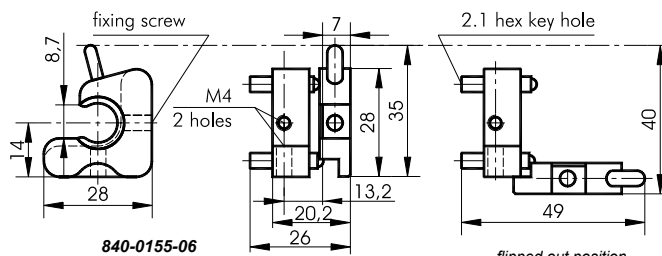

840-0155-06

flipped out position

Model	Type	Accepts optics	Clear aperture, mm	Price, EUR
840-0155-06		Ø12.7 mm (0.5 inch)	Ø10.2	99
840-0155-07	Mirror version	Ø12.7 mm (0.5 inch)	Ø10.2	99
840-0155-08		Ø25.4 mm (1 inch)	Ø24	104
840-0155-09	Mirror version	Ø25.4 mm (1 inch)	Ø24	104

Note: Mirror version is a right hand version of the standard.

**840-0160**  
**840-0170**


**PRISM HOLDERS**



840-0170-04



840-0160

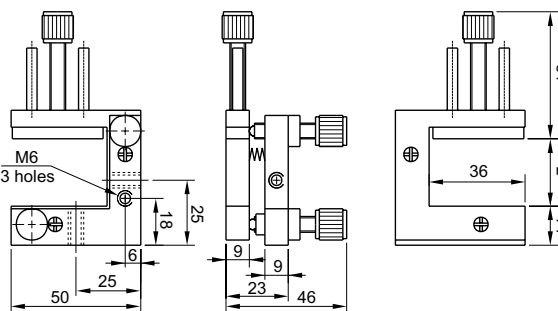

840-0160

Prism holders 840-0160 and 840-0170 provide easy and safe mounting of prism type optics. Precision kinematic adjustment around two orthogonal axes ranges within  $\pm 6^\circ$ .

The screw position locks ensure right and reliable optical components position fixing. Precise screws provide 8 arcsec adjustment resolution. The model 840-0160 accepts optics 0–26 mm height.

The model 840-0170 accepts 24.5–51 mm

height optics. Additionally models 840-0160-02 and 840-0170-02 are completed with model 870-0010 precise screws. 840-00160-04 and 840-0170-04 options come with model 870-0020 micrometer screws with reading marks.

The models 840-0160 and 840-0170 are completed with steel screws M6×0.5 mm and brass collar with an outer thread M10×1 mm.

Finish: black oxidized steel.

Complementary Products

Code	Page
870-0010	8.138
870-0020	8.138
870-0071	8.142

Code	Optics L height, mm	Adjustment screw	Weight, kg	Price, EUR
840-0160	0+26	870-0071	0.22	63
840-0160-02	0+26	870-0010	0.28	115
840-0160-04	0+26	870-0020	0.28	125
840-0170	24.5+51	870-0071	0.24	65
840-0170-02	24.5+51	870-0010	0.30	117
840-0170-04	24.5+51	870-0020	0.30	127