

Base Mounts & Accessories


795-0010 SILENT RODS



- Antivibration filling
- Ø32 mm stainless steel rod
- M6 tapped holes on both ends
- Designed for use with breadboards up to 0.5 m² square surface

Great stiffness, sturdiness and strength of steel allow the Silent Rods 795-0010 to support large loads with great stability. Each rod has M6 tapped holes and a groove around both ends. So, for mounting to tables, you may use thread adapters and clamp 820-0125.

A Silent Rod consists of a stainless steel tube filled with vibration damping plastic. Even without external damping elements applied, the rods have high resonant frequency and low vibration amplitudes. Steel ensures strength and thermal stability.

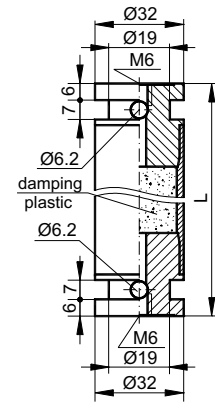

Model	L, mm	Weight, kg	Price, EUR
795-0010-10	100	0.26	24
795-0010-20	200	0.54	27
795-0010-30	300	0.77	30

Complementary Products

Code	Page
820-0125	8.37



The example of use of silent rods



820-0125 clamp the rod exactly at the middle

795-0016 THREAD ADAPTERS



Thread Adapters 795-0016 connect components when precise orientation in plane is not required. Some adapters have different threads on ends. So, you can connect components with M4 and M6 threaded holes. Material: stainless steel. Metric/imperial thread adapters are available on request.

Model	A	D
795-0016-44	M4	2
795-0016-66	M6	3
795-0016-85	8-32	5/64
795-0016-11	1/4-20	1/8

Model	A	D
795-0016-44	M4	2
795-0016-66	M6	3
795-0016-85	8-32	5/64
795-0016-11	1/4-20	1/8

C and D denote hex key sizes.

