




NOTES:

1. Material: UVFS;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Wedge: <3 min;
5. Protective chamfers: 0.3 mm x 45°;
6. Laser Induced Damage Threshold: > 1 J/cm<sup>2</sup> at @1064nm, 50Hz, 11nsec pulses;

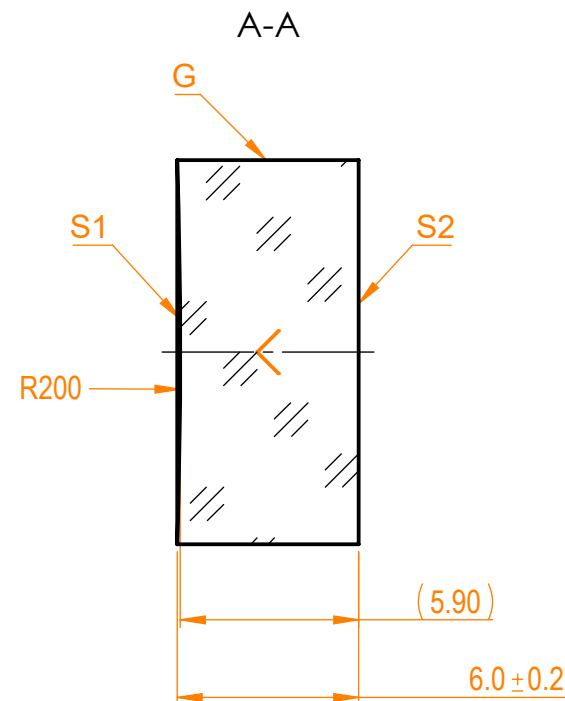

Isometric view 1:1

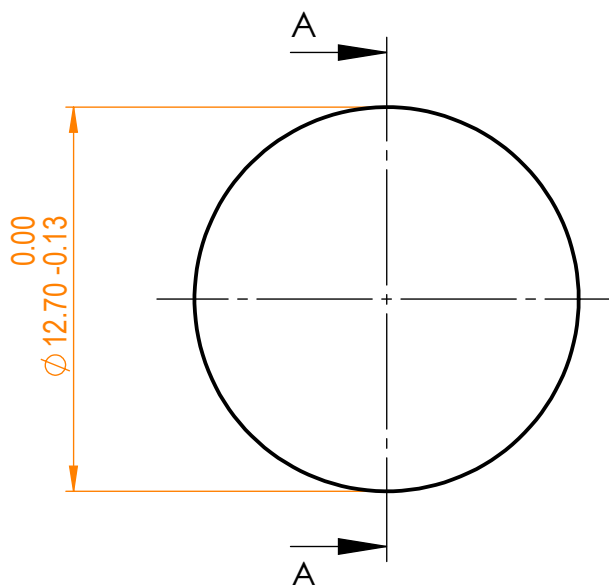

Specifications are subject to change without notice  
Dimensions are for reference only

Parameters

|                     | S1                                    | S2               |
|---------------------|---------------------------------------|------------------|
| Shape               | Concave                               | Plano            |
| Radius of curvature | 200                                   | Infinity         |
| Surface flatness    | $\lambda/10$ @633nm                   | $\lambda$ @633nm |
| Surface quality     | 40-20 s/d                             | 80-50 s/d        |
| Clear aperture      | >90%                                  | >90%             |
| Coating             | Protected gold<br>Ravg>98%@900nm - IR | Uncoated         |



UVFS pl/cv mirror, D=12.7 mm, T=6 mm

| Proprietary                                                                                                                                                       |          | Name | Date       | Part number   | Rev. | Scale |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------|------------|---------------|------|-------|
| The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited. | Approved | A.K. | 2020.11.16 | 091-3130R-200 | A    | 4:1   |
|                                                                                                                                                                   | Drawn    | V.S. | 2020.11.16 |               |      |       |