

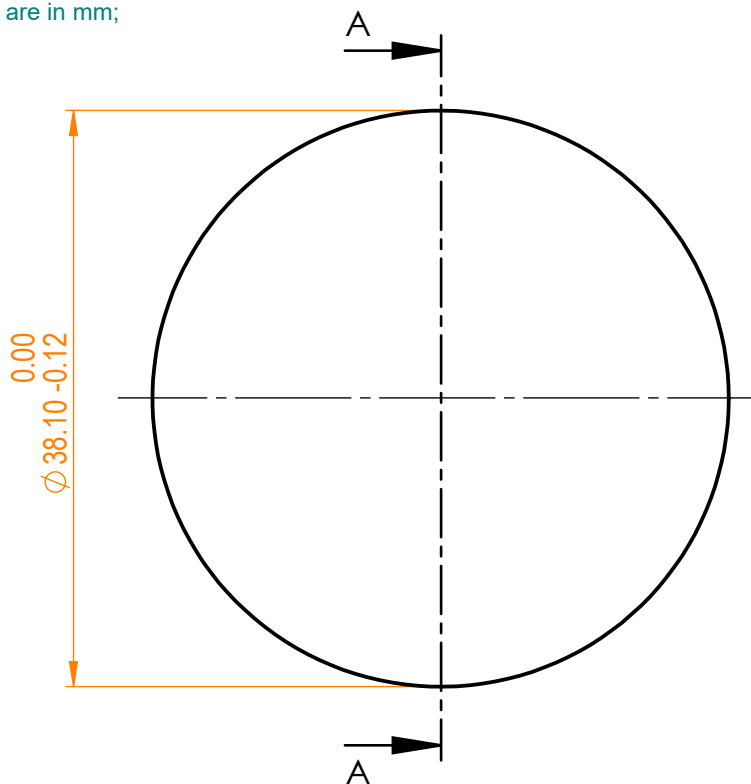


NOTES:

1. Material: N-BK7;
2. Design wavelength: 546 nm;
3. Focal length: $F=+350 \text{ mm} \pm 2\%$;
4. Centration error: $\leq 3 \text{ arcmin}$;
5. G - Fine ground surface;
6. All dimensions are in mm;



Specifications are subject to change without notice
Dimensions are for reference only

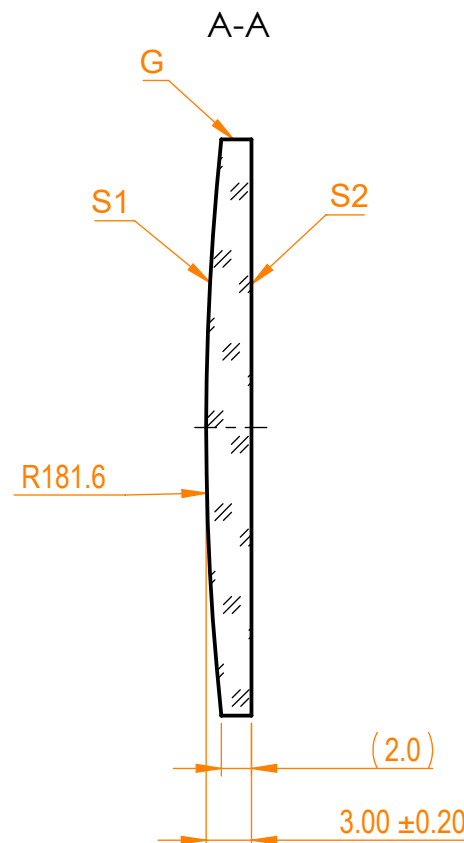

Isometric view 1:1

Parameters

	S1	S2
Shape	Convex	Plano
Radius of curvature	181.6	Infinity
Surface quality	40-20 s/d	40-20 s/d
Surface irregularity	$\lambda/8 @ 632.8 \text{ nm}$	$\lambda/8 @ 632.8 \text{ nm}$
Clear aperture	$\geq 90\%$	$\geq 90\%$
Protective chamfers	$0.2 - 0.3 \text{ mm} \times 45^\circ$	$0.2 - 0.3 \text{ mm} \times 45^\circ$



N-BK7 pl/cx lens, D=38.1 mm, F=350 mm

Proprietary		Name	Date	Part number	Rev.	Scale
The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2019.02.01	110-0421E	A	2:1
	Drawn	M.B.	2019.02.01			