



NOTES:

1. Material: Neutral Density Color Glass;
2. G - Fine ground surface;
3. Thickness depends on material;
4. All dimensions are in mm;
5. Protective chamfers: 0.3 mm x 45°;
6. Parallelism: <3 arcmin;
7. Optical density: 0.4;
8. Transmission: T>40%@546nm;



Isometric view 1:2

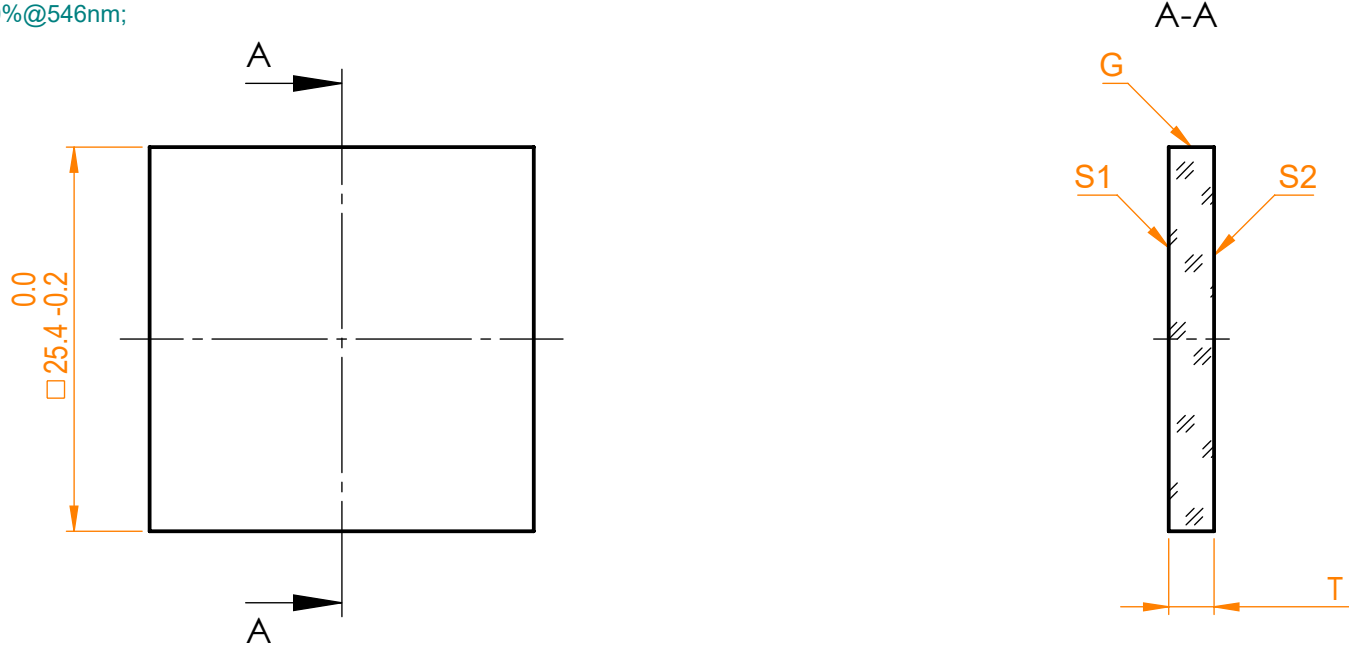

Specifications are subject to change without notice
 Dimensions are for reference only

| Parameters | | |
|------------------|------------------|------------------|
| | S1 | S2 |
| Shape | Plano | Plano |
| Surface flatness | λ @633nm | λ @633nm |
| Surface quality | 60-40 s/d | 60-40 s/d |
| Clear aperture | >90% | >90% |
| Coating | - | - |



NDAT filter, L=H=25.4 mm, OD=0.4

| | | | | | | |
|---|----------|------|------------|-------------|------|-------|
| Proprietary | | Name | Date | Part number | Rev. | Scale |
| The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited. | Approved | A.K. | 2020.12.10 | 240-2604 | A | 2:1 |
| | Drawn | V.S. | 2020.12.10 | | | |