




NOTES:

1. Material: UVFS;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Apex angle tolerance: ± 2 arcmin;

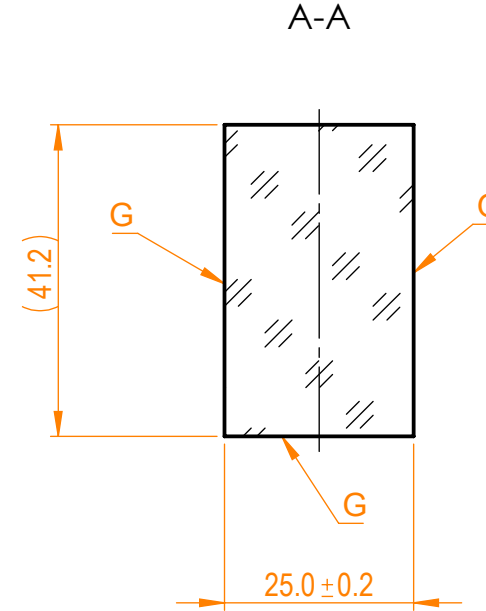


Isometric view 1:3

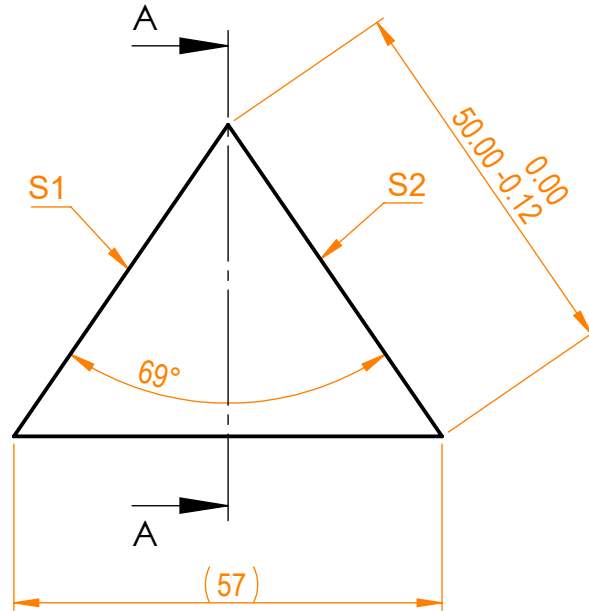

Specifications are subject to change without notice
 Dimensions are for reference only

		Parameters	
		S1	S2
Shape		Plano	Plano
Surface flatness		$\lambda/4$ @633nm	$\lambda/4$ @633nm
Surface quality		40-20 s/d	40-20 s/d
Clear aperture		>90%	>90%
Coating		-	-



info@eksmaoptics.com
www.eksmaoptics.com

LD prism, L=50 mm, T=25 mm

Proprietary		Name	Date	Part number	Rev.	Scale
The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.12.14	320-1525	A	1:1
	Drawn	V.S.	2020.12.14			