




NOTES:


1. Material: UVFS;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Apex angle tolerance: ± 2 arcmin;
6. Pyramid tolerance: ± 1 arcmin;

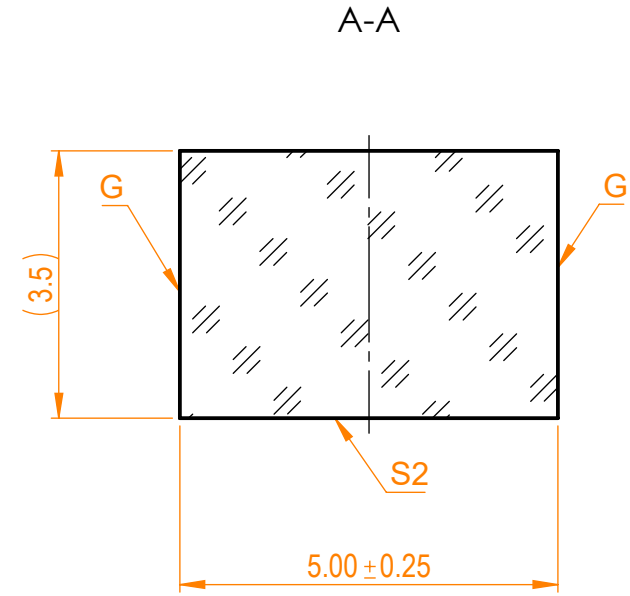

Isometric view 2:1

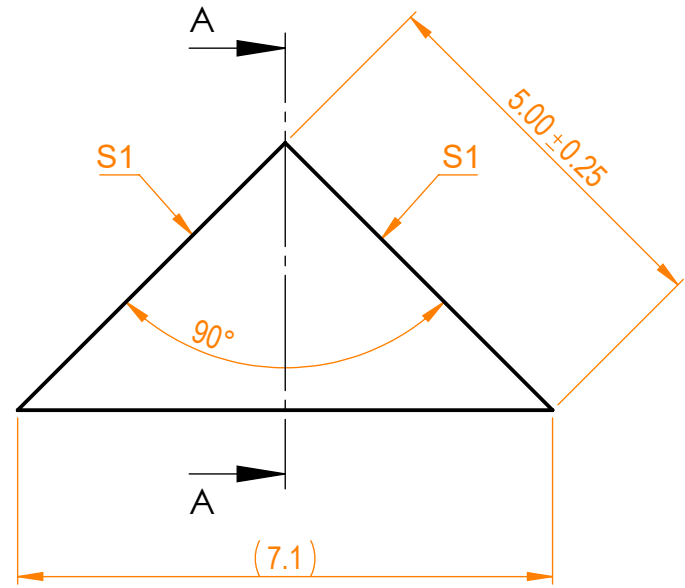

Specifications are subject to change without notice
Dimensions are for reference only

		Parameters		 info@eksmaoptics.com www.eksmaoptics.com		RA prism, L=5 mm, T=5 mm				
		S1	S2			Proprietary	Name	Date	Part number	Rev.
Shape		Plano	Plano							
Surface flatness		$\lambda/4$ @633nm	$\lambda/4$ @633nm							
Surface quality		40-20 s/d	40-20 s/d							
Clear aperture		>80%	>80%							
Coating		-	-							
				The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.12.14	330-1052	A	10:1
					Drawn	V.S.	2020.12.14			