



**NOTES:**


1. Material: N-BK7;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Angle tolerances: ±5 arcsec;
6. Beam deviation: 180° ±30 sec;

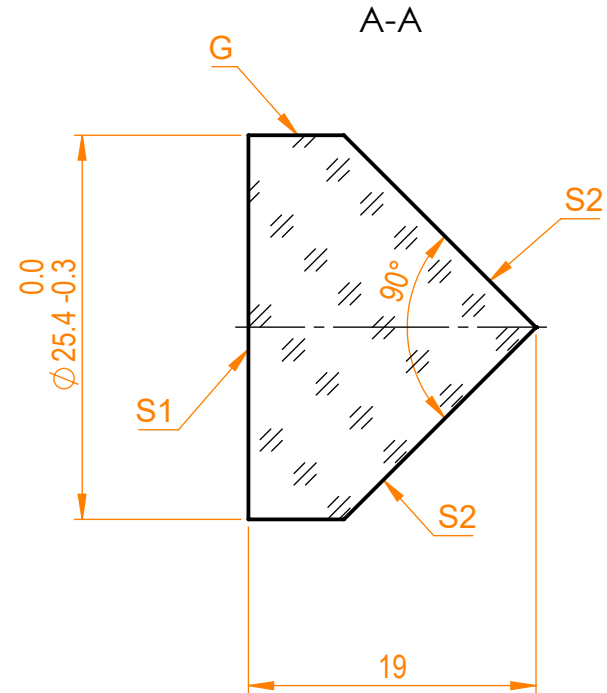

Isometric view 1:2

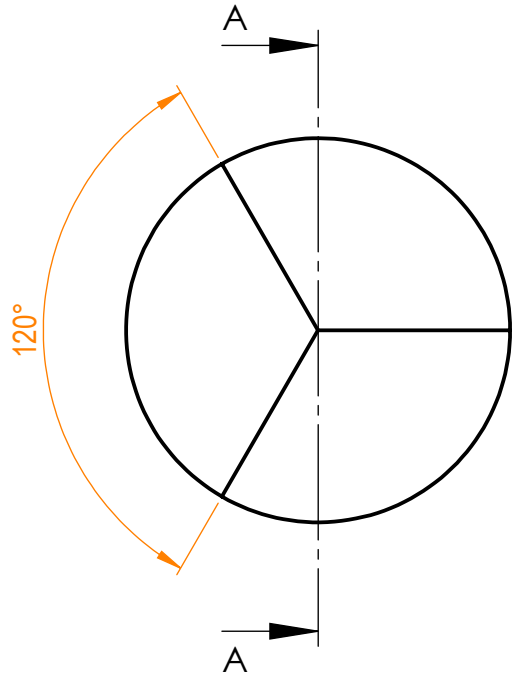

Specifications are subject to change without notice  
Dimensions are for reference only

		Parameters		 info@eksmaoptics.com www.eksmaoptics.com		CC prism, D=25.4 mm, H=19 mm				
		S1	S2			Proprietary	Name	Date	Part number	Rev.
	Shape	Plano	Plano							
	Surface flatness	λ/4 @633nm	λ/4 @633nm	The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.12.14	340-0219	A	2:1
	Surface quality	40-20 s/d	40-20 s/d		Drawn	V.S.	2020.12.14			
	Clear aperture	>80%	>80%							
	Coating	Uncoated	Uncoated							