




NOTES:

1. Material: N-BK7;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Protective chamfers: 0.3 mm x 45°;
5. Angle tolerances: ±5 arcsec;
6. Beam deviation: 180° ±30 sec;

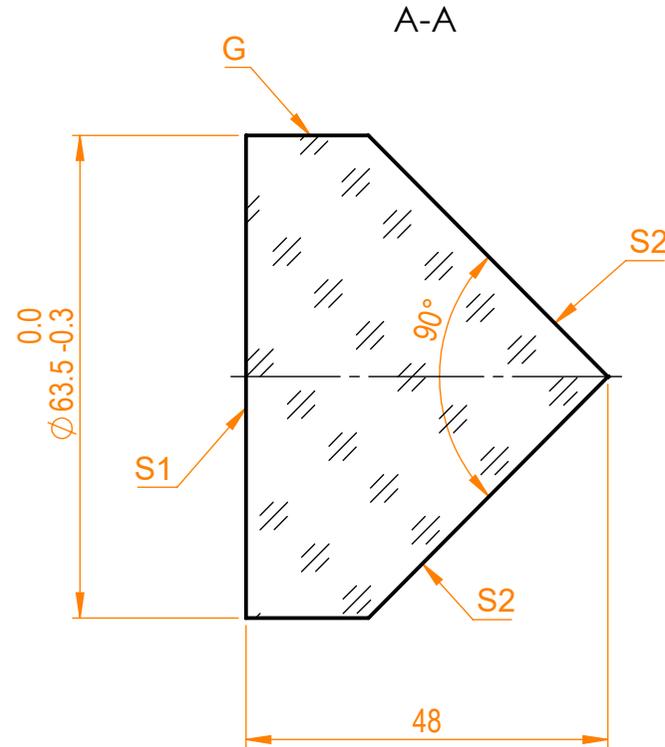

Isometric view 1:4

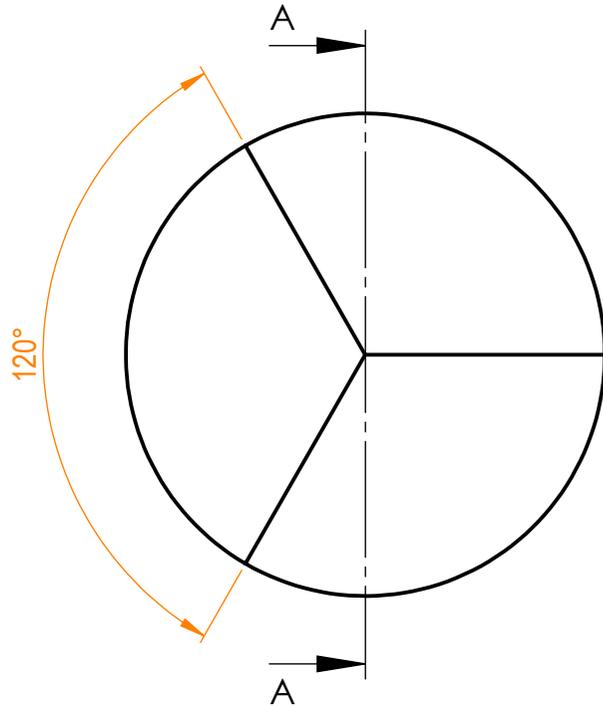

Specifications are subject to change without notice
Dimensions are for reference only

		Parameters		 info@eksmaoptics.com www.eksmaoptics.com		CC prism, D=63.5 mm, H=48 mm				
		S1	S2			Name	Date	Part number	Rev.	Scale
	Shape	Plano	Plano	Proprietary The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.12.14	340-0648	A	1:1
	Surface flatness	λ/4 @633nm	λ/4 @633nm							
	Surface quality	40-20 s/d	40-20 s/d							
	Clear aperture	>80%	>80%							
	Coating	Uncoated	Uncoated							