



# NOTES:

1. Material: UVFS;
2. Wedge: <30 arcsec;
3. LDT: >20 mJ/cm<sup>2</sup>, 50 fsec, 100Hz, 266 nm;
4. Coating adhesion and durability: MIL-C-675A;
5. G - Fine ground surface;
6. All dimensions are in mm;

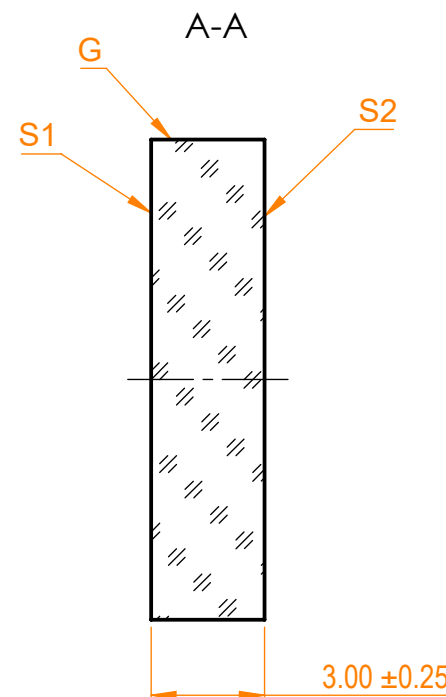

Isometric view 1:1

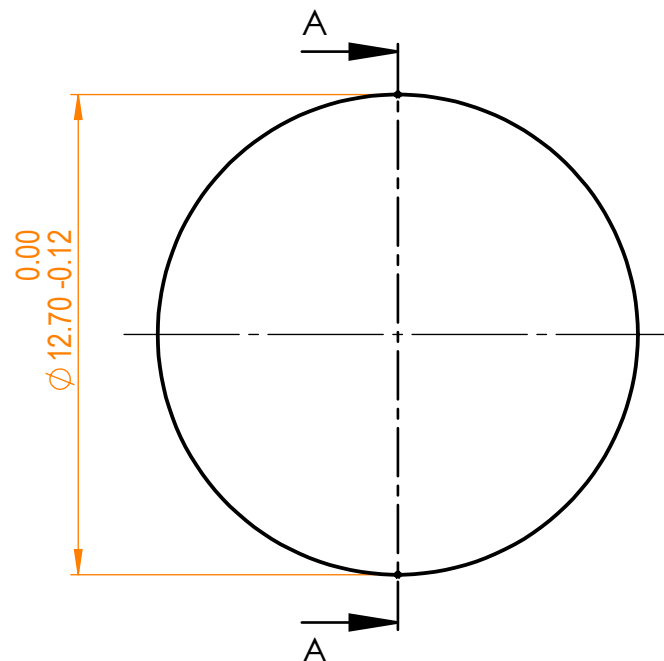

Specifications are subject to change without notice  
Dimensions are for reference only

## Parameters

|                     | S1                                | S2                       |
|---------------------|-----------------------------------|--------------------------|
| Shape               | Plano                             | Plano                    |
| Surface quality     | 20-10 s/d                         | 20-10 s/d                |
| Surface flatness    | $\lambda/10$ @632.8 nm            | $\lambda/10$ @632.8 nm   |
| Protective chamfers | 0.2 - 0.3 mm x 45°                | 0.2 - 0.3 mm x 45°       |
| Clear aperture      | ≥85%                              | ≥85%                     |
| Coating             | Rs=20±3% @266nm, AOI=45°, Low GDD | ARs<0.5% @266nm, AOI=45° |



info@eksmaoptics.com  
www.eksmaoptics.com

D=12.7 mm, Femtoline Laser Beamsplitter

| Proprietary                                                                                                                                                       |          | Name | Date       | Part number | Rev. | Scale |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------|------------|-------------|------|-------|
| The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited. | Approved | A.K. | 2020.12.22 | 041-7920S   | A    | 5:1   |
|                                                                                                                                                                   | Drawn    | M.B. | 2020.12.22 |             |      |       |