NOTES:
1. Material: N-BK7;
2. G - Fine ground surface;
3. All dimensions are in mm;
4. Parallelism: <30 arcsec;
5. Protective chamfers: 0.3 mm x 45°;
6. Laser Induced Damage Threshold: >2 J/cm^2 at @1064nm, 10Hz, 8nsec pulses;

Isometric view 1:2

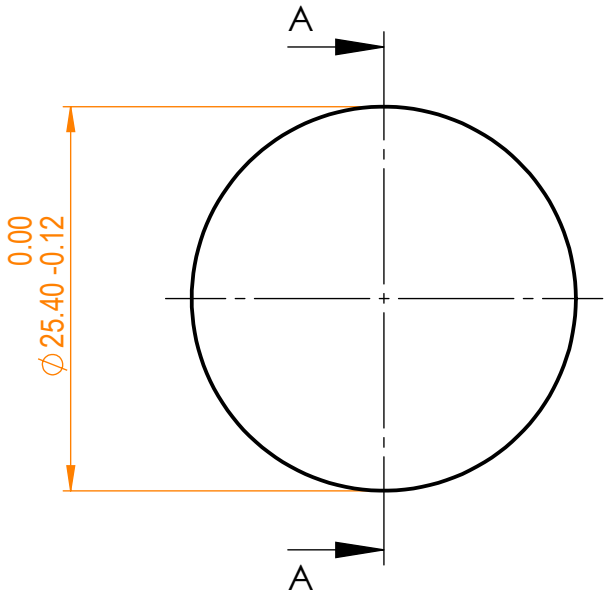

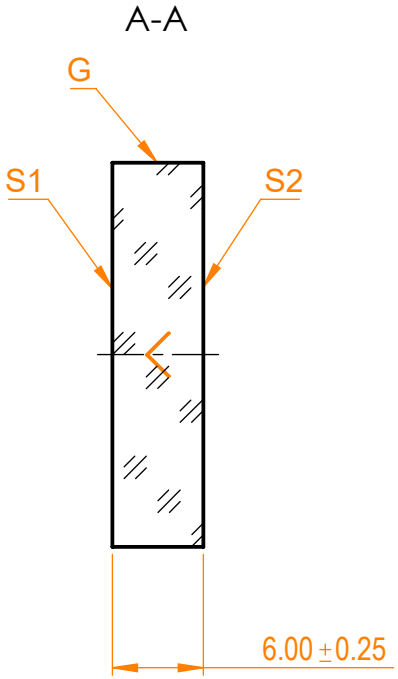

Specifications are subject to change without notice
Dimensions are for reference only

Parameters		
	S1	S2
Shape	Plano	Plano
Radius of curvature	Infinity	Infinity
Surface flatness	λ/10 @633nm	λ/10 @633nm
Surface quality	20-10 s/d	20-10 s/d
Clear aperture	≥85%	≥85%
Coating	HR(s+p)/2>99.5%@633nm, HT(s+p)/2>90%@1064nm, AOI=45°	AR<0.5%@1064nm, AOI=45°

EKSMA OPTICS
info@eksmaoptics.com
www.eksmaoptics.com

N-BK7 pl mirror, D=25.4 mm, T=6 mm

Proprietary		Name	Date	Part number	Rev.	Scale
The information in this drawing is property of EKSMA Optics. Any reproduction in part or as a whole without the written permission of EKSMA Optics is prohibited.	Approved	A.K.	2020.09.11	042-6105	A	2:1
	Drawn	V.S.	2020.09.11			